




PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION  
International Bureau

## INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<b>(51) International Patent Classification <sup>5</sup> :</b>  <b>A61B 5/0205</b>	<b>A1</b>	<b>(11) International Publication Number:</b> <b>WO 91/11956</b>  <b>(43) International Publication Date:</b> 22 August 1991 (22.08.91)
<b>(21) International Application Number:</b> PCT/SE91/00106 <b>(22) International Filing Date:</b> 14 February 1991 (14.02.91) <b>(30) Priority data:</b> 9000564-6 16 February 1990 (16.02.90) SE <b>(71)(72) Applicants and Inventors:</b> LINDBERG, Lars-Göran [SE/SE]; Knektgatan 18, S-582 65 Linköping (SE). ÖBERG, Åke [SE/SE]; Ugglebovägen 79, S-590 60 Ljungsbro (SE). <b>(74) Agents:</b> WENNBORG, Göte et al.; Kransell & Wennborg AB, Sandhamnsgatan 42, S-115 28 Stockholm (SE).		<b>(81) Designated States:</b> AT (European patent), BE (European patent), CA, CH (European patent), DE (European patent), DK (European patent), ES (European patent), FR (European patent), GB (European patent), GR (European patent), IT (European patent), JP, LU (European patent), NL (European patent), SE (European patent), US.  <b>Published</b> <i>With international search report.</i> <i>In English translation (filed in Swedish).</i>

**(54) Title:** A MONITOR WHICH ANALYSES PULS FREQUENCY BY PHOTOPLETHYSMOGRAPHIC MEASUREMENT AND A MEASURING METHOD THEREFOR

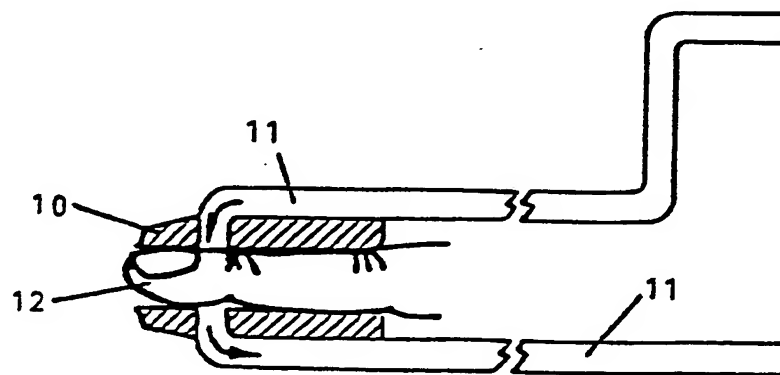**(57) Abstract**

A pulse-frequency analyzing monitor which is provided with an optical sensor and which is intended for measuring photoplethysmographically the blood circulation of a subject, such as a body part of a human being or an animal, includes a light source, preferably a light-emitting diode for infrared light, fibre optics, a detector unit for detecting the alternating voltage, or AC-component of a generated PPG-signal for the purpose of determining the heart frequency of the subject, an electronic amplifying unit and a presentation unit, for instance an oscilloscope of a display unit. The apparatus also includes means for separating from the detected PPG-signal a signal component which indicates the respiration frequency of the subject. The PPG-signal is coupled to a filter, preferably a digital filter, which enables limit frequencies and the degree of amplification to be set. The digital filter may be a component of a microprocessor which is able to eliminate disturbances, for instance disturbances emanating from 50 Hz stray light, in addition to separating signals concerning the heart and respiration frequency of the subject. The invention also relates to a method of carrying out such photoplethysmographic measuring processes.

LEE & MORSE, P.C.  
 ATTORNEY DOCKET NO. 249/447  
 SN 10/824,387, FILED 15 APRIL 2004

IDS. 4 2006.10.24

**FOR THE PURPOSES OF INFORMATION ONLY**

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	ES	Spain	MG	Madagascar
AU	Australia	FI	Finland	ML	Mali
BB	Barbados	FR	France	MN	Mongolia
BE	Belgium	GA	Gabon	MR	Mauritania
BF	Burkina Faso	GB	United Kingdom	MW	Malawi
BG	Bulgaria	GN	Guinea	NL	Netherlands
BJ	Benin	GR	Greece	NO	Norway
BR	Brazil	HU	Hungary	PL	Poland
CA	Canada	IT	Italy	RO	Romania
CF	Central African Republic	JP	Japan	SD	Sudan
CG	Congo	KP	Democratic People's Republic of Korea	SE	Sweden
CH	Switzerland	KR	Republic of Korea	SN	Senegal
CI	Côte d'Ivoire	LI	Liechtenstein	SU	Soviet Union
CM	Cameroon	LK	Sri Lanka	TD	Chad
CS	Czechoslovakia	LU	Luxembourg	TG	Togo
DE	Germany	MC	Monaco	US	United States of America
DK	Denmark				

A Monitor which Analyses Puls Frequency by Photoplethysmo-  
Graphic Measurement and a Measuring Method therefor

Technical Field

10 The present invention relates to monitoring apparatus  
provided with an optical sensor and functioning to  
analyze pulse frequencies by measuring the blood circu-  
lation of a measuring object, such as a part of the  
human body or an animal body using photoplethysmography  
(PPG-measuring), said apparatus being of the kind set  
15 forth in the preamble of Claim 1. The invention also  
relates to a method of taking such measurements.

Photoplethysmography (hereinafter abbreviated to PPG)  
has been known to the art for more than 50 years and is  
applied technically for measuring peripheral blood  
20 circulation. The method is primarily used for measuring  
heart frequencies and  
blood circulation when performing surgery. The method  
has many advantages, since, among other things, it is  
non-invasive and does not subject the patient to any  
25 appreciable trauma. Furthermore, the method requires no  
highly expensive or complicated equipment in order to be  
put into effect.

30 When light from a suitable light source impinges on  
the skin, the light is dampened or attenuated according  
to the nature of the tissue on which the light impinges.  
This light attenuation is assumed to be constant. The  
light also passes through a number of blood vessels and  
is also attenuated by the blood present. The light is  
35 attenuated as a result of a number of complex processes,  
such as absorption, reflection and different forms of

scattering. The PPG-technique is based on the assumption that the more blood that is present in the volume investigated, the more the light is attenuated. This results in two signal components of interest, namely a DC-component which corresponds to the total amount of blood in the investigated volume and an AC-component which signifies pulsation of the blood flow.

In order to study the aforescribed phenomenon, it is necessary to use a light source, a light detector, amplifying electronics and a display unit, for instance an oscilloscope or a printer.

The light source and the detector may be placed on a respective side of the object on which blood circulation is to be measured, and the detector consequently measures the light transmitted. This technique is, at times, referred to as transmission-photoplethysmography and can only be applied to a few skin surfaces, such as fingers, ear lobes and toes.

A more general method is to place both the light source and the detector in one and the same probe and measure the light reflected. This technique is known as reflection \* and is the dominating technique. It has long been understood that the pulsating component or AC-component of the PPG-signal is contingent on changes in blood volume during each heart beat. The greater the volume of blood, the less light will impinge on the detector.

It is obvious, however, that this is not the whole truth. Tests have been carried out in which blood has been allowed to pulsate in rigid glass tubes, where changes in volume are impossible and where solely the flow rate pulsates. A pulsating PPG-signal is also obtained in this case, which can be explained by the

detection of changes in orientation of the erythrocytes, which varies during each heart beat.

5 In summary, there are at least two reasons for the AC-component, namely a change in blood volume and the orientation of the erythrocytes.

10 A typical PPG-signal has, in the time plane, the form of a blood-pressure curve having the same periodicity as the heart beats. The signal also includes a number of low frequencies.

15 The present invention is based on the realization that the lower frequencies occur as a result of changes in blood flow caused by the sympathetic nerve system and by respiration, this realization being based on the known fact that the intrathoracic pressure is lowered when breathing-in, or inspiring. This subpressure is utilized to "suck" the venous blood into the atrium and ventri-  
20 cle.

The invention departs from this starting point and assumes that this subpressure causes variations in blood flow in venous plexus and also that it should be possi-  
25 ble to detect this variation with the aid of the PPG-technique, particularly by using a technique which enables measurements to be made in the venous plexus.

30 Nerve signals in the sympathetic nerve system also influence the blood flow. The smooth muscle around the vessels pulsates at a frequency which lies close to the respiration frequency. This pulsation is normally referred to as Traube-Hering's waves, after the scien-  
35 tists' Traube-Hering. Waves of a still lower frequency are also found, these waves normally being referred to as Mayer's waves.

The blood also pulsates through the so-called arterio-venous anastomoses, so as to control body temperature. This normally occurs at a frequency of about 0.3 Hz and is designated Burton waves.

5

#### Disclosure of the Invention

The present invention is based on the aforesaid realization and on measurements, or assays, carried out with the aid of apparatus that has been constructed in accordance with the theory on which the present invention is based.

10

The inventive monitoring apparatus intended for measuring blood circulation is of the kind set forth in the preamble of Claim 1 and has the characterizing features set forth in the characterizing clause of said Claim.

15

The exhaustive experimentation, which forms the basis of the invention and which is briefly described herebelow, has shown that respiration is the totally dominating low-frequency component of the PPG-signal.

20

It was found from the series of experiments performed that the extracted signal can be encountered substantially irrespective of where in the body the probe is placed. This leads to the conclusion that the extracted PPG-signal constitutes a measurement of variations in blood pressure caused by respiration, and therewith also variations in the flow of blood through the object under examination.

25

30

It is expected that the inventive monitoring apparatus will find universal use within human care establishments. In the case of patients in intensive care wards or under anaesthetic or under postoperative conditions,

35

it is important to monitor heart and respiration frequencies. When these two physiological variables are known, the doctor or nursing syster will have a good picture of the patient's general condition. Monitoring  
5 of these variables under anaesthetic conditions can facilitate the assessment of the depth of anaesthesia.

Above all, the invention avoids those serious disadvantages that are associated with respiratory frequency  
10 monitoring methods and apparatus hitherto used, all of which are normally unreliable, besides being both strenuous and complex.

It is generally more important to monitor respiration  
15 parameters in the case of infant care than in the case of adults under intensive care. In this regard, the inventive monitoring apparatus is superior to the technique which has been used most frequently hitherto, namely the use of impedance plethysmography with the aid  
20 of ECG-electrodes placed on the surface of the skin, among other things because such electrodes (normally three) take-up a relatively large area of the thorax. When requiring to make X-ray examinations, it is necessary to remove the electrodes, since they are not trans-  
25 parent to X-rays.

Furthermore, light disturbances from peripheral electrical apparatus are induced in ECG-cables with associated  
30 input amplifiers. The signal cables are coupled both inductively and capacitively. When carying out surgery, it is impossible to carry out ECG-recordings and to measure heart frequencies over prolonged periods of time, due to the surgical application of diathermy.

35

ECG-electrodes and the paste used together therewith

cause irritation of the skin, particularly when monitoring is effected over a prolonged period and particularly in the case of infants whose skin is very tender and sensitive. The electrodes and associated leads or cables  
5 also limit the ability of the child to move.

The present invention provides important direct advantages in relation to the aforesaid, and also affords indirect advantages with respect to methods of measuring  
10 respiration frequency.

For example, the inventive monitoring apparatus can be applied and handled with ease; it avoids the aforesaid problems associated with prolonged use of skin electrodes; it is free from disturbances during surgery in  
15 which diathermy is applied; and affords a wide degree of freedom with regard to positioning of the sensor. For example, a sensor-provided probe can be placed on a finger or on a toe, at a distance from the thorax region  
20 where another investigation is being made. Furthermore, the sensor element can be made very small, such as not to interfere with X-ray examinations to any appreciable extent.

25 An additional, very important advantage afforded by the inventive monitoring apparatus is that it can be integrated with a number of different medical instruments of the kind where heart frequency and respiration frequency are important parameters, for instance pulsoxymetry and  
30 defibrillators.

In order to enable measurements to be taken directly on patients, it is necessary to equip the monitoring apparatus with one or more filters. This will result, however,  
35 in difficulty in selecting limit frequencies, since the signal can exhibit pronounced variations.



Accordingly, one preferred embodiment of the invention is characterized in that the apparatus includes one or more filters, preferably digital filters, which have means for setting limit frequencies and the degree of amplification. Filters of this kind are suitably incorporated in the apparatus, which will also preferably include means for electronically detecting the frequency content of the signal for selection and setting of limit frequencies.

10

According to another embodiment of the monitoring apparatus, the filters are adaptive and are constructed to adapt to the prevailing heart and/or respiration frequency, so as to optimize the filter properties.

15

Furthermore, the monitoring apparatus will preferably be provided with means for DC-compensating the PPG-signal, so as to balance-out the low frequency components of said signal automatically, without experiencing harmful energy losses.

20

In the case of one embodiment of the invention which is particularly beneficial in practical application, the monitoring apparatus includes a probe which is intended to be placed on a suitable part of the body, for example a finger, and which includes means for delivering light to said body part and means for capturing light which passes through said body part or which is reflected therein, for the purpose of passing this light to the detector unit. This monitoring apparatus is characterized by optical fibres connected to the probe and functioning to conduct light from a light source to the skin and from the skin to the detector unit respectively.

25

30

By conducting, in said apparatus, the light through optical fibres to and from the skin, there is obtained a

35

system which is highly resistant to electromagnetic disturbances or interference, a feature which is extremely important within the sphere of medical treatment. This particular feature enables the heart frequency and respiration frequency to be recorded during surgery in which diathermy is applied. An apparatus of this kind which is insensitive to disturbances during surgery represents a very important step forwards in the art.

10

The inventive monitoring apparatus preferably includes a microprocessor which is programmed to calculate the Fourier transform, and/or to separate signals concerning the heart and respiration frequencies of the object by digital filtration, and/or to eliminate disturbances, emanating, for example, from stray light of frequency 50 Hz.

15

A further possibility afforded by the use of microprocessor technology is that of combining the measuring process with SaO<sub>2</sub>-measuring with pulsoxymetry.

20

The present invention also relates to a method of carrying out photoplethysmographic measuring processes, this method being characterized mainly by the characteristic features set forth in Claim 9.

25

#### Disclosure of the Experiments Performed

With the intention of confirming the aforescribed theory scientifically, namely the theory that it is also possible to separate from a PPG-signal whose dominating component forms a measurement of the heart frequency of the object being examined, a signal component which discloses the respiration frequency of said object, a simple photoplethysmograph was constructed. Four differ-

30

35

ent measuring probes were mounted on the photoplethysmograph, all of which probes used a light-emitting diode as a light source. One probe utilized the wavelength 875 nm, two utilized the wavelength 940 nm and one utilized the wavelength 950 nm. All probes measured reflected light. The photoplethysmograph operated either within the frequency range of 0.2-10 Hz or the frequency range 0.2-20 Hz.

The photoplethysmograph was used to measure the blood circulation of dogs, cats, adult males aged 35 years and infants in incubators. In order to show both the respiration frequency and heart frequency in the photoplethysmograph signal, the heart frequency and respiration frequency of the adults and the infants were recorded separately with the aid of other methods. In the case of the animals used in this experiment, solely the respiration frequency was recorded separately. These measurements were used as reference signals in the measuring-data analysis. All measurements were recorded on a measurement tape-recorder.

The measurement data was analyzed partly in the time plane, where the two components in the photoplethysmograph signal were filtered out, and partly in the frequency plane, wherein the power spectrum was calculated. A cross-correlation function for the photoplethysmograph signal and the reference signals was also calculated. The following conclusions can be drawn from these analyses:

The apparatus functions well on adults. The heart frequency and respiration frequency can be separated by means of filter techniques. The heart frequency is the dominant signal component. The two components are clearly evident in the power spectrum and the cross-

correlation function shows correlation with the reference signals.

5 In the case of infants in respirators, respiration is the totally dominant component. It is slightly more difficult to filter-out the two components in the case of infants than in the case of adults. Although the two frequencies are evident in the power spectrum, respiration dominates the spectrum totally. The cross-correlation function shows correlation with the reference signals.

10 The respiration frequency is the dominant signal component in the case of animals. Although a high frequency component can be filtered-out, it cannot be guaranteed that this component is the heart frequency. The power spectrum has a broad band with many peaks or spikes whose origin cannot readily be established. The cross-correlation function was constructed solely for respiration, where correlation can be shown.

20 A more detailed account of the experiments carried out is given below, with reference to the accompany drawings, in which

25 Figure 1 is a block schematic which illustrates the principle construction of the measuring electronics used;

30 Figures 2 and 3 are schematic views of measuring probes used in the experiment series;

Figures 4 and 5 are circuit diagrams with associated component signs; and

35 Figure 6 illustrates the principle of transmission

measuring with the aid of fibre optics and with the aid of a probe fitted to one finger of the object.

5 Infrared light-emitting diodes were used as the light source. Light-emitting diodes are small, mechanically insensitive and have a light intensity which is proportional to the diode current. The AC-component of the PPG-signal is weak and must be greatly amplified. The light intensity should be high, in order to obtain a  
10 high signal level. This is achieved by pulsating the light-emitting diode with a high current. This enables a much higher diode current to be used than in the case of continuous light. The use of pulsated light results in time-discrete measurement of a time-continuous signal.

15 According to the sampling theorem, it is necessary for the pulse frequency to be twice as large as the frequency content of the signal, in order to recreate the continuous signal. This frequency content should be  
20 beneath 20 Hz. The pulse frequency selected was 1 kHz, which fulfils the sampling theorem more than well. The diode illuminating time was 40  $\mu$ s, which constitutes a fraction of the period time 1 ms. Since the illuminating time is so short in relation to the dark time, it is  
25 possible to use a very high diode current without destroying the light-emitting diode.

For the purpose of obtaining a continuous measurement response, the measuring values are maintained constant  
30 between each new measuring process, with the aid of a sample-and-hold circuit. In order to guarantee that a measurement value is obtained when the diode emits light at full intensity, the sample-and-hold circuit is closed (and therewith holds the measurement value) before  
35 extinguishing the light-emitting diode.

The signal from the sample-and-hold circuit is equalized by passing said signal through a low-pass filter.

5 The principle construction of the measuring electronics will be seen from Figure 1. References are made to the circuit diagram shown in Figure 4.

#### The Measuring Probe

10 Four different measuring probes, referenced A-D, were constructed during the experimental period. All of these measuring probes included a detector in the form of a light-emitting diode model S-4C from United Detector Technology.

15

Three different light-emitting diodes were used, namely:

	Probe	Wavelength	Light Power
	A Philips CQY 58	875 nm	0.5 mW
20	B, C Telefunken TSUS 5400 (corresponds to Philips CQY 99)	950 nm	15 mW
	D Hewlett-Packard HEMT 1001	940 nm	2.5 mW

25 It should be observed in this respect that the light was comparatively broad-band light and that the wavelength values refer to maximum intensity. The power value denotes the power radiated totally in a hemisphere and is estimated from existing data sheets in the case of  
30 HEMT 1001. It should also be mentioned that the light-emitting diodes spread light differently.

Figure 1 illustrates a measuring probe comprising an acrylic tube 4 in which a light-emitting diode 1 and a  
35 detector in the form of a light-emitting diode 2 are embodied or cast with epoxy resin 5. The tube 4 has a

diameter of 8 mm and is surrounded by a tube 3 of diameter 12 mm.

5 The probe illustrated in Figure 3 differs from the probe illustrated in Figure 2, in that the detector 2 is angled in relation to the detector surface.

10 The following light-emitting diodes were used with the different probes:

Probe A uses light-emitting diode CQY 58  
Probes B and C uses light-emitting diode HEMT 1001  
Probe D uses light-emitting diode TSUS 5400

15 Probes A and D were constructed in the same way as the probe B shown in Figure 2.

20 The cables used between probes and electronic devices were very thin and flexible, screened four-conductor cables sold by Telko under the trade name Pick-uptråd PU 402.

#### Pulse Electronics

25 The pulse electronics used had two functions, firstly to drive the light-emitting diodes and secondly to generate and deliver control signals to the sample-and-hold circuit. The fundamental component of the pulse electronics is a bistable flip-flop which generates a square  
30 wave having a frequency of 1 kHz. This flip-flop is constructed around two Nand-gates (IC 1A and B in the circuit diagramme of Figure 4), and a buffer circuit (IC 2). The clock frequency is proportional to the product R2 and C1. The capacitor C24 is required, to lead away  
35 disturbing high frequencies.

The control pulses are generated by a monostable flip-flop (IC3), which is triggered on positive flanks by flanks of the square wave.

- 5 Those times at which the monostable flip-flop is "high" is determined by the product R3 and C2 for the light-emitting diode, and by the product R4 and C3 for the sample-and-hold circuit.
- 10 Current is supplied to the light-emitting diode through a transistor stage built around a Darlington transistor (T1 in Figure 4). A Darlington transistor is actually two transistors connected in series and has the positive property of having a very high current-amplifying
- 15 factor.

The voltage drop across collector and emitter reached about 1.4 V.

- 20 The light-emitting diode control pulse was connected to the base of the transistor via a resistor (R5), which was dimensioned so that the transistor would bottom at high pulse values and throttle at low pulse values.
- 25 The resistor R41 was coupled in parallel with the collector resistor R6 by means of a switch on the front panel of the apparatus used, such as to obtain a high collector current and a high light intensity. The collector current was 130 mA in position "low" and 180 mA
- 30 in position "high".

#### The Current-Voltage Converter

- 35 The light-emitting diode in the measuring probe was biased electrically with +2.5 V in the reverse direction. This voltage was produced by IC11, which is a



precision regulator and which held the voltage stable. A linear detector response was guaranteed in this way. The light-emitting diode now delivered a reverse current which was proportional to the detected light intensity. This current was converted to a voltage, by a current-voltage converter constructed around an operational amplifier (IC4).

It shall be noted that the current-voltage converter was an inverting circuit.

#### The Sample-and-Hold Circuit (IC5)

The circuit functioned to hold the time-discrete measurement values constant between each new measuring process. Sample-and-hold circuits, however, are encumbered with the disadvantage that disturbances in the form of spikes from the control logic leak through to the measurement value. This is particularly pronounced in respect of the weak AC-component. In order to reduce this disturbance, the amplitude of the control signal was scaled down to about 2 V over the resistors R39 and R40. An external holding capacitor C15 on 1.0  $\mu$ F was connected to the circuit. This capacitor also assisted in damping the disturbance spikes.

#### Low-Pass Filter 200 Hz

The purpose of the first low-pass filter was to eliminate the disturbance spikes deriving from the sample-and-hold circuit. The filter was an active Tjebychiev filter of the fourth order, followed by a passive RC-link. The filter had been designed to permit 0.5 dB ripple in the pass band and to have a cut-off frequency of 200 Hz. The filter was built-up around two cascade-coupled operational amplifiers (IC 6A and B) and

the RC-link R16 and C9.

The High-Pass Filter 0.1 Hz

5     The high-pass filter eliminated the DC-component, there-  
by enabling amplification of the AC-component. The  
filter was an active Tjebychhev filter of the second  
order, constructed around an operational amplifier  
(IC7). The filter was designed to permit 0.5 dB ripple  
10    in the pass band and to have a cut-off frequency of  
0.1 Hz.

Amplification 1-500 Times

15    The amplifier was a non-inverting amplifier constructed  
around a offset-compensated operational amplifier  
(IC10). The amplification was varied with the aid of a  
potentiometer positioned on the front panel.

20    Notch Filter 50 and 100 Hz

The weak AC-component was greatly disturbed by the net  
frequency 50 Hz, and also by disturbances from lamps and  
fluorescent tubes at 100 Hz. These disturbances were  
25    eliminated in two cascade-coupled notch filters. The  
notch filters were constructed around two operational  
amplifiers (IC 8A for 50 Hz and IC 8B for 100 Hz). The  
filters could be adjusted in the frequency direction?,  
with the aid of potentiometers R29 for the 50 Hz-filter  
30    and R30 for the 100 Hz-filter, such as to filter-off  
precisely the desired frequency.

Amplification 10 Times

35    The signal was amplified a further 10 times in a non-  
inverting amplifier constructed around an operational

amplifier (IC9A).

#### Low-Pass Filter 20 Hz

5     The signal passed through an active Tchebychev filter of  
the third order, having a cut-off frequency of 20 Hz.  
This construction permitted a 0.3 dB ripple in the pass  
band. The filter was constructed around an operational  
amplifier (IC9B). The output signal was coupled to a  
10    BNC-switch labelled "Output 20 Hz" located on the front  
panel.

#### Low-Pass Filter 10 Hz

15    The signal finally passed through a low-pass filter of  
the same kind as that described in the foregoing, with  
the cut-off frequency of 10 Hz. The signal was then  
coupled to a BNC-switch labelled "Output 10 Hz" located  
on the front panel.

20

#### The Net Part

The measuring electronics comprised a digital pulse  
part, and an analogue amplifying and filtering part. One  
25    problem which readily occurs when mixing digital tech-  
nique with analogue technique is that disturbances occur  
in the form of spikes from the digital side to the  
analogue side. This disturbance can be reduced by using  
a separate supply voltage on the two parts. Accordingly,  
30    the built-in power unit was constructed around a trans-  
former which had two secondary windings, each producing  
a secondary voltage of 12 V. This alternating voltage  
was rectified to  $\pm 5$  V with the aid of rectifying  
bridges, smoothing and disturbance-eliminating capaci-  
35    tors and integrated regulators. Particular mention can  
be made to the fact that the light-emitting diode of the

probe was powered by a current of between 100 and 200 mA. Consequently, there was used a more powerful regulator capable of delivering more current to the digital  $\pm 5$  V-side (cf the circuit diagramme shown in Figure 5).

5

#### The Light Intensity of the Probes

The following measuring process was carried out in order to obtain an estimation of the mutual intensity relationship between the various probes.

The probes were connected and a photometer was held directly against the probes. The luminous intensity of the probes was observed from the photometer. It shall be noted that this is an integrated measurement value and not the intensity when the diodes are illuminated. The measurement values are shown in the following table.

Probe	<u>Intensity</u>	
	<u>"Low"</u>	<u>"High"</u>
A	25.1 $\mu$ W	-
B	15.2 $\mu$ W	19.0 $\mu$ W
C	18.4 $\mu$ W	22.7 $\mu$ W
D	32.1 $\mu$ W	38.7 $\mu$ W

It was found that probe D could not be used to take measurements in practice, since the system became self-oscillating. This problem was not rectified. Probes B and C were found to provide a better result than probe A, probably because the light emitted had a longer wavelength (875 nm for probe A, 950 nm for probes B and C and 940 nm for probe D).

#### Measurements and Results

The auto-measuring process was effected by recording the

PPG-signal on tape. The respiration frequency was also taped at the same time. When measuring blood circulation on human beings, the heart frequency was also measured, but with other methods. These signals were used as reference signals for the two components of the PPG-signal.

Measurements were taken on three different groups of objects, namely animals, infants in incubators, and adult males aged 35-years.

A narrow selection of the measurements taken are presented below. This selection is neither a random selection or a particularly representative selection. It is rather an example of those measurements which were considered to be of interest in evaluating the technique. An attempt to form a conclusion from these measuring processes is made below.

#### 20 Measuring Equipment

In addition to the aforescribed PPG-equipment, the respiration frequency of animals and adult human beings was measured with the aid of Strain Gauge equipment, which had the form of a strain sensor consisting of a thin rubber hose filled with mercury and connected to a measuring bridge. The heart frequency of the adult human beings was measured with the aid of laser-doppler equipment. When laser-doppler equipment was used, a minor investigation was also carried out in order to ascertain whether or not the respiration frequency could be traced in the laser-doppler signal. The heart frequency was not measured separately on the animals used in the experiment. In the case of infants, the heart frequency was measured with ECG and respiration was measured with an impedance plethysmograph.

The measured signals were coupled directly to a measurement tape-recorder and thereafter to an oscilloscope, where they could be monitored during the actual measuring process.

5

#### Processing Measurement Data

No measurement data was processed during the actual measuring processes. All data processing was, instead, carried out on the taped signals. The measurement data was processed in three different ways, namely by filtration, Fourier analysis and cross-correlation.

10

#### 15 Filtration

The PPG-signal was coupled to a system of active filters, where different types of filter, limit frequencies and amplifications could be set. This enabled the different components to be filtered-out and compared with respective reference signals. The two signals were presented simultaneously on a printer.

20

#### Fourier Analysis

25

The signals were processed on an Ericsson PC, using the signal processing programme ASYSTANT. The power spectrum of the PPG-signals and the reference signals was calculated and comparisons subsequently made in the frequency plane.

30

#### Cross-Correlation

The cross-correlation function is a good way of ascertaining whether or not the periodicity of one signal is found in another signal. For example, it can be ascer-

35

tained whether support is found for the assumption that the respiration period is found in the PPG-signal.

5

The cross-correlation function  $C(k)$  is calculated by the computer as:

$$C(k) = \frac{1}{N} \sum_{n=0}^{N-1-|k|} X(n) Y(n+|k|)$$

where  $N$  is the number of measuring points,  $k$  is the shift between the signals,  $X(n)$  is the one signal and  $Y(n)$  is the other signal. It should be noted that the computer works with sampled signals.

The cross-correlation function is thus a form of convolution function where the one signal can be said to "slide" over the other. Assume, for example, that one signal is the PPG-signal and the other the respiration signal measured with a Strain Gauge. If the respiration frequency is found in the PPG-signal, there is obtained a periodic cross-correlation function which has the same periodicity as the respiration function. Furthermore, in this case, the functions are symmetrical and, when there is no time-shift between the signals, their maximum amplitude for  $k$  will be equal to 0, since the signals will then be superimposed and all values will be contributing.

#### Measurements on Adult Males

When taking these measurements, the PPG-probe holder was taped firmly to the skin of the patient. The Strain

Gauge sensor was fastened over the thorax. The laser-dobbler probe was also secured with double-adhesive tape. The measurement object rested on a bed during the whole of the measuring process. Several measuring processes were carried out. The results obtained when measuring the blood circulation on a finger, the thorax and the forehead are given below.

#### Measuring Blood Circulation on a Finger

The finger tip is an extremely good region on which to measure blood circulation using PPG-technology. The signal is strong and has pronounced peaks or spikes for each heartbeat. The question asked prior to effecting this measuring process was whether or not it would be possible to detect respiration frequency. The PPG-probe C and low light intensity were used in this measuring process.

Studies in the time plane showed that the PPG-signal exhibited clear heart-signal peaks. A periodic low-frequency variation was also observed. The variation in amplitude between heartbeats was about 1 V, the maximum variation reaching to about 3 V. When counting the spikes or peaks in the two resultant diagrams, there is obtained a pulse of 54 beats per minute in both cases.

In a subsequent series of tests, the PPG-signal was filtered in a high-pass filter having a limit frequency of 0.5 Hz. The low-frequency variation was then filtered-out.

The PPG-signal was then passed through a low-pass filter having a limit frequency of 0.5 Hz. The respiration signal was used as a reference signal. Good agreement was found between the signals. The amplitude variations



in the PPG-signal were about 3 V. When counting the peaks or spikes, a respiration frequency of 15 breaths per minute was obtained.

- 5 In a subsequent test series, the PPG-signal was passed through a low-pass filter having a limit frequency of 0.5 Hz and the test objects were asked to hold their breath. Variations in the PPG-signal were observed to fall and became smaller than 1 V.

10

#### Frequency Analysis

- 15 Since the test objects were at rest throughout the whole of the measuring process, it can be assumed that the signal was stationary over a long period of time. Consequently, frequency studies were carried out at measuring intervals of slightly longer than 50 seconds (1024 occasions). When studying the power spectrum of the PPG-signal and the power spectrum of the respiration signal and the laser-doppler signal, it was found that the PPG-signal contained two frequency peaks which coincided with the respiration peak and the heart-frequency peak.

20

#### Cross-Correlation

25

- The cross-correlation function between the different measuring methods was calculated at intervals of 25 seconds. It was evident from this that the PPG-signal was well correlated with both the respiration and laser-doppler measurement values. The laser-doppler signal, on the other hand, was not particularly correlated with the respiration signal. The laser-doppler technique is thus not suited for measuring respiration frequency.

30

#### Conclusion

35

The finger tip is a splendid location in which to perform the PPG-technique. Both the respiration frequency and the heart frequency could be measured with the equipment used.

5

#### Thorax Measurement

10 A similar test series was carried out with the probe placed in the third intercostal space. Probe A with low light intensity was used in this instance.

#### Conclusion

15

The tests showed that the thorax is also a feasible region on which to take measurements in accordance with this technique. It is probable that thorax movements were reflected in the signal.

20

#### Forehead Measurement

The last measuring process carried out on adult human beings comprised a series of tests with the probe placed  
25 on the forehead of the object. Probe C with low intensity was used in this case. It was established that the forehead is not a good region on which to take measurements with the aid of PPG-technology, since the response is very weak. On the other hand, the forehead is a  
30 region which exhibits low-frequency variation of blood flow in the head, designated vasomotion. It is possible to detect this variation with laser-doppler technique. The investigation was intended to show whether or not this variation is discernible with PPG-technology or  
35 whether it is respiration that is measured.

Conclusion

A frequency study of the measuring results, and primarily of the cross-correlation function, showed clearly that the PPG-signal contained both respiration frequency and heart frequency. This is not seen clearly in the time-plane, however, which is possibly because the forehead is not a good region on which to carry out the measuring process. The laser-doppler signal also contained low-frequency components, as evident from the frequency spectrum. This is probably due to vasomotion. It is also possible that this variation is also found in the PPG-signal.

15 Measuring the Blood Circulation of  
Infants in Incubators

When measuring the blood circulation of infants, it was found that the respiration component was clearly dominating and not the heart frequency as in the case of the adult human beings. This can be explained by the fact that the thorax-configuration of infants produces a more pronounced thoracical subpressure when infants inspire. Furthermore, the heart frequency of infants is much higher than that of adult human beings, up to 200 beats per minute. The respiration frequency is also higher, namely up to 100 breaths per minute. The infants were monitored continuously with respect to heart frequency, which was registered by ECG, and respiration, which was registered by impedance plethysmography. The same electrodes were used for both measuring processes. The two measuring signals were taped simultaneously with the PPG-signal. The blood circulation of three different infants was measured in total.

### Conclusion

The series of tests carried out showed that the technique also functions with infants, although respiration frequency is the dominant signal component in this case. It is far more difficult to filter out both of the components, since it is necessary to heavily suppress the strong respiration frequency. The limit frequency chosen for the high-pass filter lay close to the heart frequency, in order to be able to suppress the respiration frequency. The reason why the heart frequency was very weak and needed to be further amplified can be explained by the fact that the measuring process was carried out on the thorax and that thorax movement obviously contributed to the respiration component.

### Additional Measuring Processes

A similar series of measuring processes was carried out on infants who lay on their stomachs with the probe fastened to the spines of respective infants and on the soles of the feet of said infants. The results showed that the respiration frequency was the dominant component even when measuring blood circulation at locations so widely spaced as the thorax and the soles of the feet. The amplitude of the PPG-signal obtained when measuring blood circulation in the soles of the feet was lower, however, than the amplitude obtained in the other measuring processes.

### Measuring Blood Circulation on Animals

The blood circulation of ten dogs and two cats was measured. All animals were either given a general aesthetic or were locally anaesthetized before performing the different surgery entailed. The stomachs of many of

the animals were shaved, in which case blood circulation was measured on the shaved part of the skin. The probe holder was attached to a rubber belt placed tightly around the animal concerned. Respiration was recorded with the aid of a Strain Gauge device. Heart frequency was not measured separately.

It was more difficult to analyze the measuring data obtained with animals than the measuring data obtained with human beings. The signal quality was poorer. As with the case when measuring the blood circulation of infants, it was found that the respiration frequency was the dominant component of the signal. The measuring results obtained with the various dogs differed radically. It was difficult to establish a pattern in the results obtained. Difficulties were also experienced in filtering-out the two components. The heart frequency was especially difficult to find. A heart-frequency reference signal was often desired. Neither did the frequency analysis provide a clear result. The spectrum contained many peaks whose origins were difficult to establish. A great deal of this uncertainty is probably due to harmonics. Neither do dogs always have a uniform heart frequency, since the heart frequency of dogs is influenced by respiration, among other things. As a result, the signal is not stationary for any length of time, which makes frequency analysis difficult.

#### Evaluation of the Measuring Results

The series of tests carried out indicate that it is quite possible to detect the respiration frequency and heart frequency of adult human beings and infants with the aid of equipment constructed in accordance with the present invention. With regard to measuring the blood circulation of animals, the results are more dubious.

Several of the measuring processes, however, showed positive tendencies and it is probably also possible to measure the blood circulation of animals, although it is necessary to improve signal quality in this case.

5

An Attempt to Quantify the Measuring Results

The following table summerizes the measuring processes carried out and constitutes an attempt to quantify the quality of the measurements on the processed signals and calculated signal parameters. This assessment is objective and the values presented in the table have the following vague significance:

- 10
- 15     3     A very good and clear signal or signal parameter, which should suffice for some form of electronic detection process.
- 20     2     A relatively clear signal or signal parameter to the eye of a human being, although not suitable for electronic detection unless processed.
- 25     1     A very unclear signal or signal parameter, although capable of being discerned by the trained eye. Not suitable for electronic detection.
- 0     The component sought cannot be discerned in the signal or the signal parameter.
- 30     -     No measuring process was carried out.

The mean value of the assessment made for each measuring process is given in the table. This measurement is an extremely rough measurement and should only be used to obtain a general idea of the assessments carried out.

35

table 1

	Unprocessed signal		Filtered signal		Frequency analysis		Cross-corr.		Mean value
	Heart.	Resp.	Heart.	Resp.	Heart.	Resp.	Heart.	Resp.	
<u>Adult</u>									
Finger	3	1	3	3	3	3	3	3	2.8
Thorax	2	1	3	3	3	3	2	2	2.5
Forehead	3	0	-	2	3	3	3	3	2.4
<u>Infants</u>									
Thorax	0	3	3	3	3	3	2	3	2.5
Spine	0	2	2	3	2	2	1	3	1.9
foot sole	0	2	3	3	3	2	2	2	2.1
<u>Animals</u>									
<u>Spaniel</u>									
Stomach	0	3	2	-	0	2	-	2	1.3
Rear leg	0	3	2	-	0	3	-	3	1.8
<u>Terrier</u>									
Stomach	1	1	2	3	0	3	-	3	1.9
Spine	1	0	1	0	0	0	-	0	0.3
<u>Cat</u>									
Stomach	0	3	2	-	0	3	-	3	1.8
Back paw	0	0	2	2	0	3	-	3	1.4

By unprocessed signal is meant a low-pass filtered signal having the limit frequency 5 or 10 Hz.

Apparatus for Measuring Blood Circulation  
Directly on a Object

5 On the basis of the test series briefly described above,  
there has been developed an apparatus which enables  
blood circulation to be measured directly on a object  
such as a human being or an animal. This apparatus,  
which is of the kind defined in Claim 1, enables the  
heart frequency and respiration frequency of a patient,  
10 or object, to be monitored continuously on a display or  
by means of a printer.

The probe used with the apparatus includes a light  
source, a detector unit and an electronic amplifier unit  
15 and may be of the kind described above. The apparatus  
may also include the aforescribed filter units neces-  
sary to separate from the detected PPG-signal that  
signal component which indicates the respiration fre-  
quency of the object.

20 The presentation unit may vary in accordance with re-  
quirements, and may be a display or printer, for  
instance.

25 The filter used is preferably a digital filter.

The filter or filters is/are provided with means for  
adjusting limit frequencies and degrees of amplifica-  
tion. The filter or filters is/are preferably adapted to  
30 detect the frequency content of the PPG-signal elec-  
tronically for selection and setting of suitable limit  
frequencies.

35 In order to obtain a reliable monitoring apparatus, the  
apparatus should also include a microprocessor which is  
programmed to calculate the Fourier transform. A



microprocessor of this kind may also be programmed to separate signals relating to the heart frequency and respiration frequency of the object by digital filtration. The microprocessor may also be programmed to  
5 eliminate disturbances, for example disturbances emanating from stray light having a frequency of 50 Hz.

Figure 6 illustrates a modified embodiment in which a probe 10 coacts with fibre optics and is placed on a  
10 finger 12. When light is passed through the optical fibres 11, there is obtained a system which is resistant to electromagnetic disturbances, a facility which is extremely important within health care organizations.

15 The apparatus illustrated in Figure 6 enables heart and respiration frequencies to be recorded while performing surgery with diathermy, which was not previously possible.

20 The presentation unit used with the inventive monitoring apparatus shall be constructed to correspond to the monitoring situation concerned. The unit should include the possibility of storing data over long periods of time, coupled with the possibility of quickly analyzing  
25 both the respiration frequency and heart frequency. The unit should also include conventional alarm functions, for example bradycardia and tachycardia alarm functions respectively, and also a respiration-state alarm function. The unit should also provide the possibility of  
30 documenting other media, i.e. printed media for medical journal or case history entries.

The monitoring unit may also include other, purposeful functions, for example a function which enables automatic  
35 adjustment of different signal amplitudes of the respiration and heart activities of different patients

and at different medical states or conditions. The alarm-signalling part of the unit which includes the relevant alarm limits will preferably be capable of modification in accordance with prevailing circumstances.

5

It will be evident from the foregoing that the inventive monitoring apparatus which enables both the respiration frequency and heart frequency to be measured simultaneously in a disturbance-free and galvanically-insulated fashion has a number of interesting applications in a plurality of situations where present-day methods and apparatus become disturbed or are dangerous to use. Examples of such applications include monitoring of a patient during surgery in which diathermy is applied, monitoring in high electric and magnetic fields, for instance during MR-investigations, and working-physiological investigations in industrial environments. The inventive monitoring apparatus can also be used advantageously, for example, in combination with other methods, such as pulsoxymetry, where it is desirable to record heart frequency, respiration frequency and oxygen-gas saturation, and also defibrillation with the aid of a probe.

10

15

20

25

30

The inventive monitoring apparatus can also be used in special investigations or examinations, for example in a magnetic camera while crushing kidney stones, and also in irradiation processes where other methods become disturbed.

The monitoring apparatus can also be used in veterinary medicine, particularly for assessing the depth of anaesthesia during surgery.

35

Other applications in which present-day methods are difficult to apply because of electromagnetic or acoustic disturbances include, for example, working-physiological evaluations, studies in heavy industry, the physiological reactions of fighter pilots under flying conditions, etc.

Claims

1. A monitoring apparatus provided with an optical sensor and intended for analyzing pulse frequency by measuring the blood circulation of a subject photoplethysmographically (PPG-measuring), such as a body part of a human being or an animal, said apparatus comprising
- a) a light source (1), preferably a laser diode or light-emitting diode,
  - b) a detector unit (2) which functions to detect the alternating-current component, or AC-component, of a generated PPG-signal for the purpose of determining the heart frequency of said subject,
  - c) an electronic amplifying unit,
  - d) a presentation unit, for instance an oscilloscope, a display unit or a printer,
- characterized by means for separating from the detected PPG-signal a signal component which indicates the respiration frequency of said subject.
2. Apparatus according to Claim 1, characterized in that said means is intended to separate from the PPG-signal variations in the blood flow in the skin of the object caused by the respiration frequency of said object.
3. Apparatus according to Claim 1 or 2, characterized in that said apparatus includes one or more filters, preferably digital filters, having

means for setting limit frequencies and degrees of amplification.

5 4. Apparatus according to Claim 3, c h a r a c -  
t e r i z e d in that the filters are embodied in the  
apparatus; and in that said apparatus includes  
means for electronically detecting the frequency content  
of said signal for selection and setting of limit  
frequencies.

10

5. Apparatus according to Claim 4, c h a r a c -  
t e r i z e d in that the filters are adaptive and are  
intended to adapt to prevailing heart and/or respiration  
frequencies so as to optimize filter properties.

15

6. Apparatus according to any one of Claims 1-5,  
c h a r a c t e r i z e d by means for DC-compensation  
of the PPG-signal, so that its low-frequency components  
will be automatically balanced without experiencing  
20 deleterious energy losses.



7. Apparatus according to any one of Claims 1-6, in-  
cluding a probe (10) which can be placed on a suitable  
body part, for instance a finger (12), and which in-  
25 cludes means for delivering light to said body part and  
means for capturing light which passes through said body  
part or is reflected therein and for conducting said  
light to the detector unit, c h a r a c t e r i z e d  
in that connected to the probe (10) are optical fibres  
30 (11) which function to guide the light from the light  
source to the skin of the subject and from said skin to  
the detector unit.




8. Apparatus according to any one of Claims 1-7,  
35 c h a r a c t e r i z e d in that said apparatus in-  
cludes a microprocessor which is programmed to calculate

the Fourier transform and/or, by digital filtration, to separate signals concerning the heart frequency or respiration frequency of the object and/or to eliminate disturbances originating, for instance, from 50 Hz stray light.

5  
10  
15  
20  
9. A method of measuring the blood circulation of a subject photoplethysmographically (PPG-measuring), such as a body part of a human being or an animal, using a light source, preferably a laser diode or light-emitting diode, a detector unit for detecting the alternating voltage, or AC-component, of the generated PPG-signal for the purpose of determining the heart frequency of the object, and further using an electronic amplifying unit and a presentation unit, for instance an oscilloscope, a display or printer, c h a r a c t e r i z e d by separating from the detective PPG-signal a signal component which indicates the respiration frequency of the object.

25  
10. A method according to Claim 9, c h a r a c -  
t e r i z e d by separating from the PPG-signal the variations in the blood circulation of the skin of the object caused by the respiration frequency of said object.

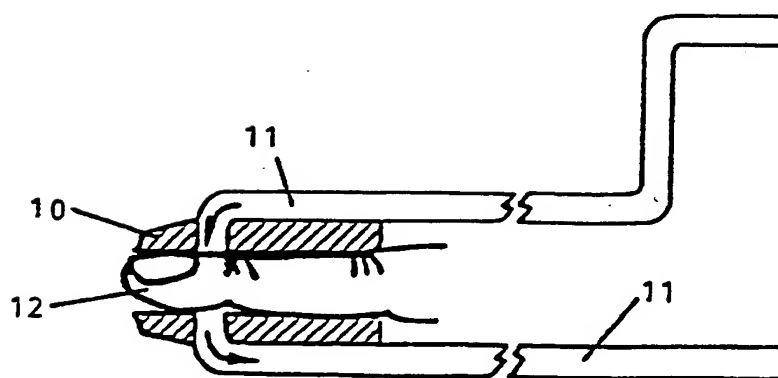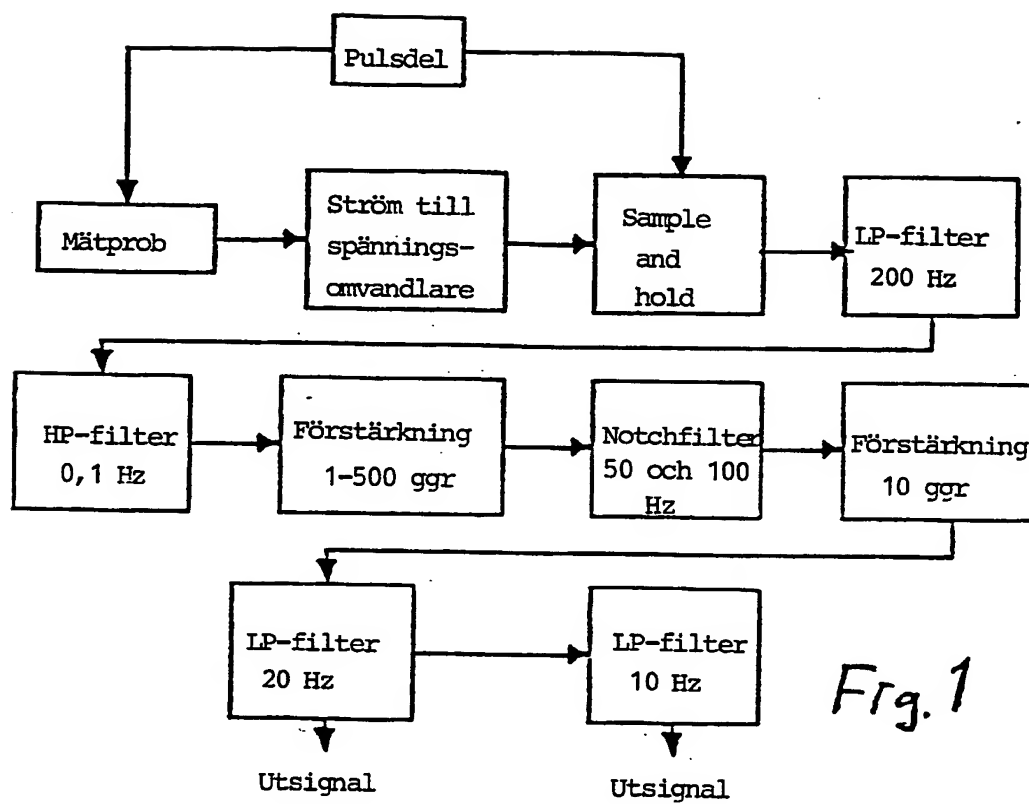

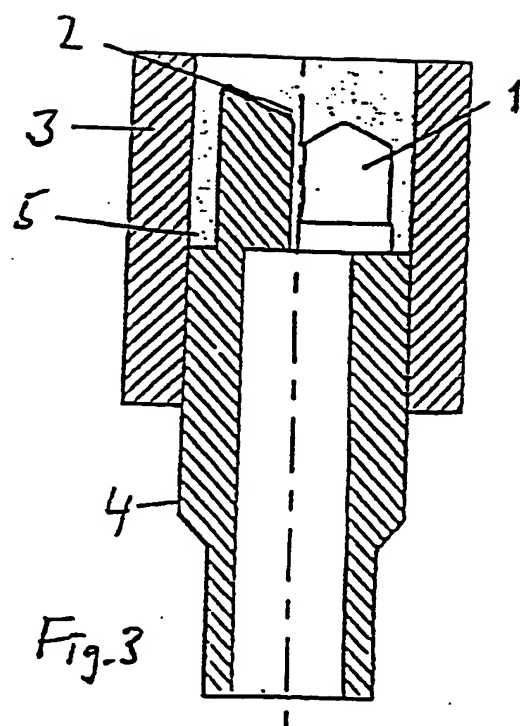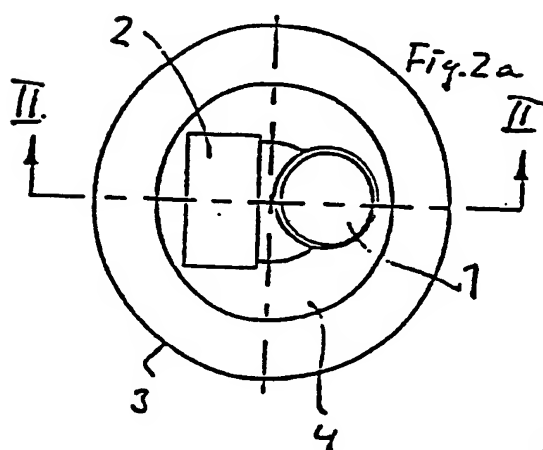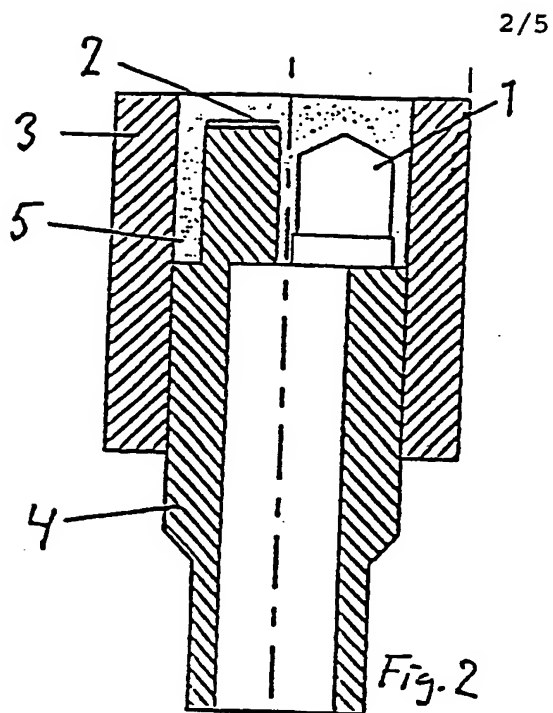



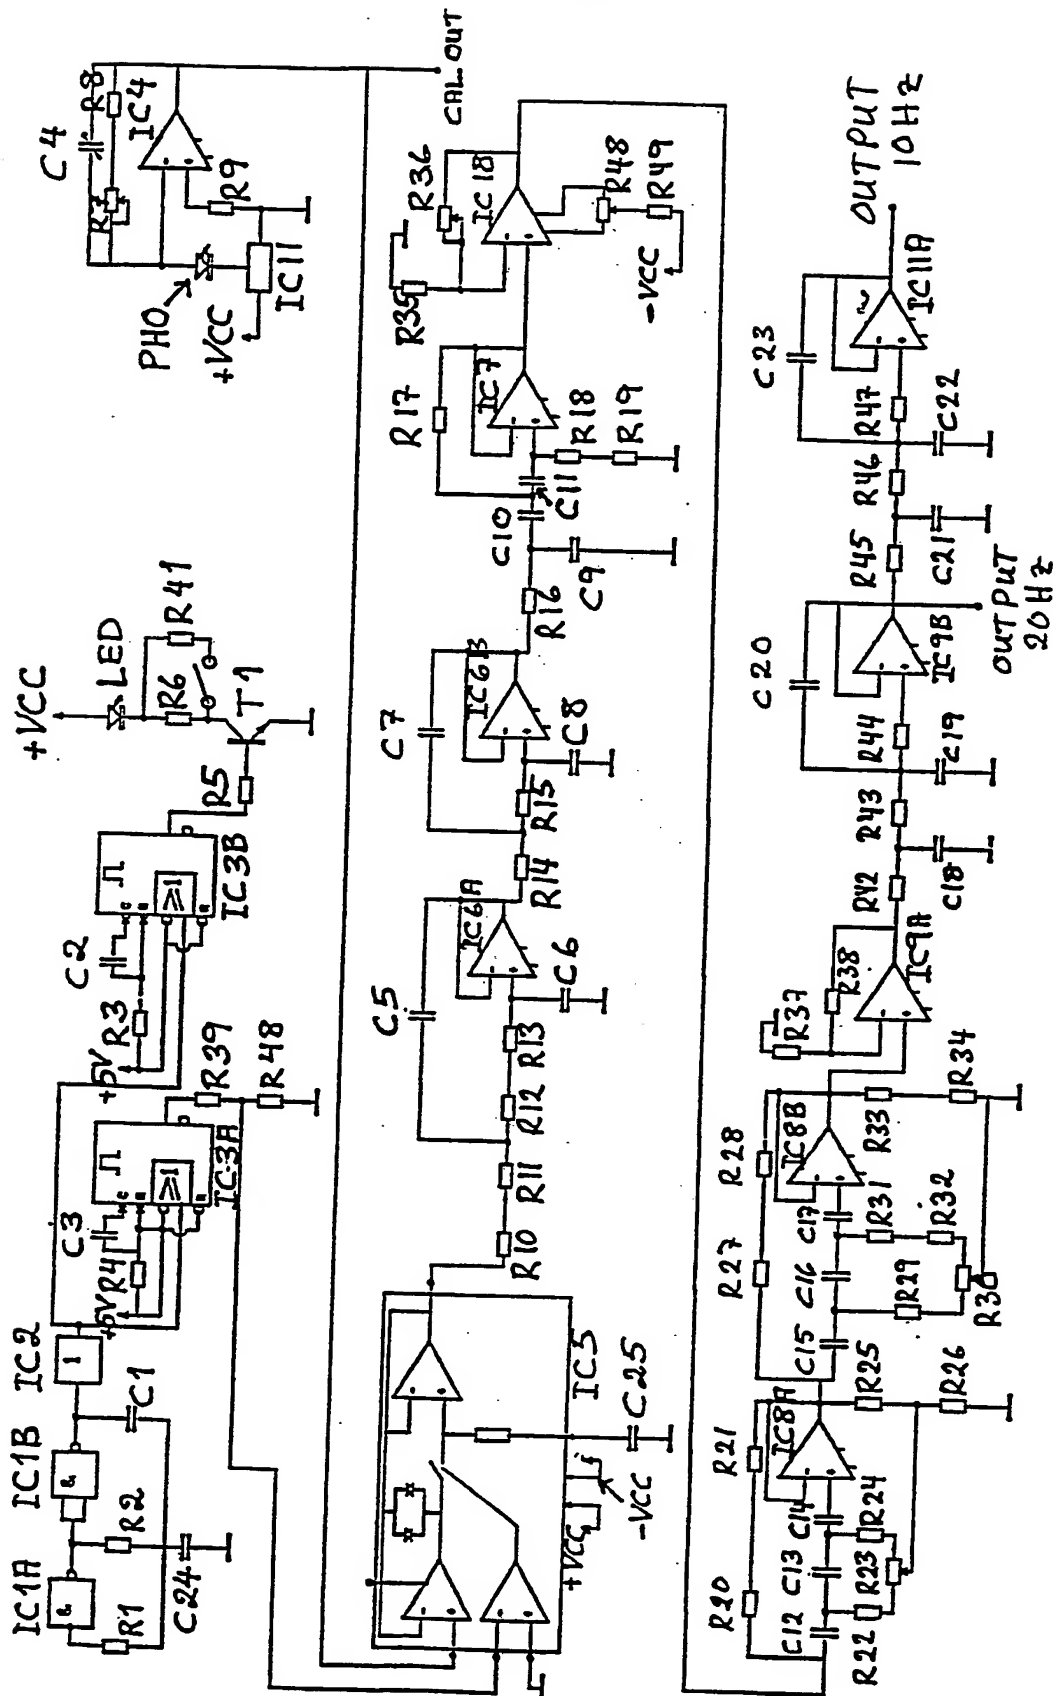


Fig. 4

Komponentförteckning

IC1	4011	R1	10M
IC2	4050	R2	15k
IC3	4538	R3	3,9k
IC4	TL071	R4	3,3k
IC5	NE537	R5	22k
IC6	TL072	R6	18 $\Omega$
IC7	TL071	R7	0-100k
IC8	TL072	R8	1k
IC9	TL072	R9	27k
IC10	TL071	R10	2,2k
IC11	AD580	P11	39k
		R12	39k
T1	BD667A	R13	2,2k
		R14	39k
PHO	UDT S-4C	R15	39k
		R16	100 $\Omega$
LED	probe A:CQY 58	R17	1,8M
	probe B HEMT 1001	R18	3,9M
	probe C:HEMT 1001	R19	1,5M
	probe D:CQY 99	R20	480k
		R21	150k
C1	22nF	R22	4,7k
C2	10nF	R23	0-100k
C3	10nF	R24	75k
C4	0-40pF	R25	82 $\Omega$
C5	33nF	R26	2,7k
C6	15n	R27	480k
C7	0,22 $\mu$ F	R28	150k
C8	6,8nF	R29	4,7k
C9	10 $\mu$ F	R30	0-50k
C10	0,22 $\mu$ F	R31	92k
C11	0,22 $\mu$ F	R32	33k
C12	47nF	R33	68 $\Omega$
C13	47nF	R34	2,2k
C14	47nF	R35	1k
C15	22nF	R36	0-500k
C16	22nF	R37	1k
C17	22nF	R38	10k
C18	22nF	R39	8,2k
C19	1nF	R40	8,2k
C20	0,1 $\mu$ F	R41	18 $\Omega$
C21	22nF	R42	560k
C22	1nF	R43	560k
C23	0,1 $\mu$ F	R44	560k
C24	15nF	R45	1M
C25	1,0 $\mu$ F	R46	1M
		R47	1M
		P48	0-100k
		P49	1,5k

Spänningsnivåer

+Vcc      +5V      -Vcc      -5V

De digitala IC-kretsarna matas med +Vcc medan OP-förstärkarna matas med +Vcc och -Vcc. De digitala kretsarna har försetts med varsin avkopplingskondensator 0,1 $\mu$ F mellan +Vcc och jord. OP-förstärkarna har likadana avkopplingskondensatorer mellan +Vcc och jord samt mellan -Vcc och jord.

SUBSTITUTE

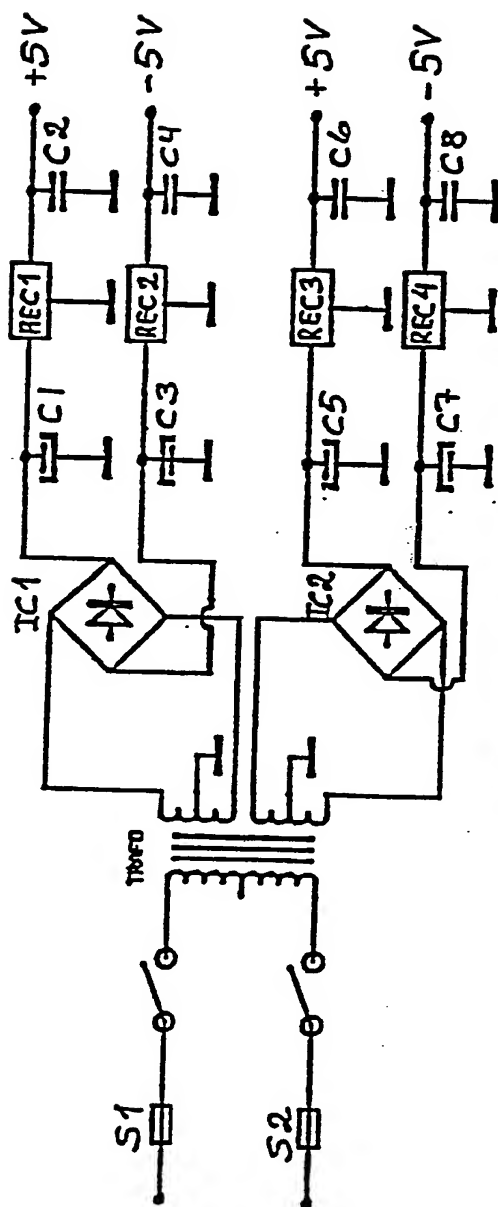


Fig. 5

Komponentförteckning, nätdelen

Trafo		Tradania type TD 3701	
S1	50mA	S2	50mA
IC1	PBDF104	IC2	PBDF104
C1	1000 $\mu$ F	C2	0.1 $\mu$ F
C3	1000 $\mu$ F	C4	0.33 $\mu$ F
C5	1000 $\mu$ F	C6	0.1 $\mu$ F
C7	1000 $\mu$ F	C8	0.33 $\mu$ F
REG1	7805	REG2	79L05
REG3	78L05	REG4	79L05

# INTERNATIONAL SEARCH REPORT

International Application No PCT/SE 91/00106

<b>I. CLASSIFICATION OF SUBJECT MATTER</b> (if several classification symbols apply, indicate all) <sup>6</sup> According to International Patent Classification (IPC) or to both National Classification and IPC <b>IPC5: A 61 B 5/0205</b>		
<b>II. FIELDS SEARCHED</b>		
Minimum Documentation Searched <sup>7</sup>		
Classification System	Classification Symbols	
IPC5	A 61 B	
Documentation Searched other than Minimum Documentation to the extent that such Documents are included in Fields Searched <sup>8</sup>		
SE,DK,FI,NO classes as above		
<b>III. DOCUMENTS CONSIDERED TO BE RELEVANT<sup>9</sup></b>		
Category <sup>10</sup>	Citation of Document, <sup>11</sup> with indication, where appropriate, of the relevant passages <sup>12</sup>	Relevant to Claim No. <sup>13</sup>
A	US, A, 4788982 (A GEDEON ET AL) 6 December 1988, see column 1, line 63 - line 67; column 2, line 10 - line 20; column 4, line 13 - line 16; column 4, line 39 - line 55 --	1-10
A	EP, A3, 0335357 (NELLCOR INCORPORATED) 4 October 1989, see the whole document --	1-10
A	EP, A1, 0341327 (HEWLETT-PACKARD GMBH) 15 November 1989, see the whole document --	1-10
A	EP, A1, 0349755 (MISAWA HOMES INSTITUTE OF RESEARCH AND DEVELOPMENT) 10 January 1990, see the whole document --	1-10
<div style="display: flex; justify-content: space-between;"> <div style="width: 45%;"> <p>* Special categories of cited documents: <sup>10</sup></p> <p>"A" document defining the general state of the art which is not considered to be of particular relevance</p> <p>"E" earlier document but published on or after the international filing date</p> <p>"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)</p> <p>"O" document referring to an oral disclosure, use, exhibition or other means</p> <p>"P" document published prior to the international filing date but later than the priority date claimed</p> </div> <div style="width: 50%;"> <p>"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention</p> <p>"X" document of particular relevance, the claimed invention cannot be considered novel or cannot be considered to involve an inventive step</p> <p>"Y" document of particular relevance, the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.</p> <p>"&amp;" document member of the same patent family</p> </div> </div>		
<b>IV. CERTIFICATION</b>		
Date of the Actual Completion of the International Search	Date of Mailing of this International Search Report	
13th May 1991	1991-05-15	
International Searching Authority	Signature of Authorized Officer	
SWEDISH PATENT OFFICE	UDO HINZ	

III. DOCUMENTS CONSIDERED TO BE RELEVANT (CONTINUED FROM THE SECOND SHEET)		
Category *	Citation of Document, with indication, where appropriate, of the relevant passages	Relevant to Claim No
A	US, A, 4183360 (W CARLSON ET AL) 15 January 1980, see the whole document --	1-10
A	DE, C1, 3811689 (NATTERMANN & CIE) 1 June 1989, see the whole document --	1-10
A	WO, A1, 8503211 (JOHNSON MATTHEY PUBLIC LIMITED COMPANY) 1 August 1985, see the whole document --	1-10
A	EP, A3, 0109826 (MEDASID LTD) 30 May 1984, see the whole document --	1-10
A	EP, A1, 0319158 (THE BOC GROUP, INC.) 7 June 1989, see the whole document -- -----	1-10

# ANNEX TO THE INTERNATIONAL SEARCH REPORT ON INTERNATIONAL PATENT APPLICATION NO. PCT/SE 91/00106

This annex lists the patent family members relating to the patent documents cited in the above-mentioned international search report. The members are as contained in the Swedish Patent Office EDP file on 91-03-23. The Swedish Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US-A- 4788982	88-12-06	EP-A- SE-A-	0232234 8600289 87-08-12 87-07-24
EP-A3- 0335357	89-10-04	JP-A- US-A- US-A-	2045041 4911167 4934372 90-02-15 90-03-27 90-06-19
EP-A1- 0341327	89-11-15	JP-A-	1320465 89-12-26
EP-A1- 0349755	90-01-10	JP-A- US-A- JP-A- JP-A-	2126831 4915116 2088040 2088042 90-05-15 90-04-10 90-03-28 90-03-28
US-A- 4183360	80-01-15	NONE	
DE-C1- 3811689	89-06-01	EP-A-	0337317 89-10-18
WO-A1- 8503211	85-08-01	EP-A-	0168461 86-01-22
EP-A3- 0109826	84-05-30	JP-A-	59139236 84-08-10
EP-A1- 0319158	89-06-07	JP-A- US-A-	1262839 4800885 89-10-19 89-01-31